








# DC 360 DIFFUSER (REBOOT EDDITION) DC 360 ディフューザー (リブートエディション)



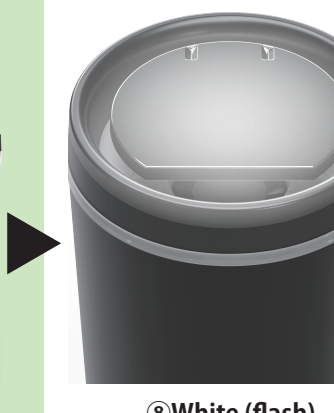






The warranty of this product is valid only in Japan.

## Check before purchase

Specification	CONTENTS
<ul style="list-style-type: none"> <li>●Power supply : <b>+DC5V 1A</b></li> <li>●Power consumption : <b>Turbo-mode/1.2W</b> <b>Normal-mode/0.5W</b> <b>Standby-mode/0.1W</b></li> <li>●Operating temperature range : <b>0~40℃</b></li> </ul> <p>●Avoid excessive heat, humid and direct sunlight. ●USB port with power supply of +DC5V 1A or above is required. See the manual of the audio device or the vehicle and check the spec of the USB before use.●Compatible with cup holders with a diameter of ≥80mm.●In order to use DC360 Diffuser(REBOOT EDDITION), DC360 Cartridge or REBOOT Cartridge sold separately is needed.●Use this product in vehicles equipped with remote engine starters or similar equipments may shorten the expiry of the scent.</p>	<div> <div>Unit ※Button</div> <div>Cable (80cm)</div> </div> <div>   </div> <div>           ※Cartridge is sold separately.            ※Check the manual of this product.         </div>

UNIT (incl. Cartridge)	! CAUTION !
weight approx. <b>220</b> g height approx. <b>112</b> mm diameter approx. <b>79</b> mm	<p>Designed only to be used in cup holders. Do not use cup holders where the product does not stable in. Check the manual of the cup holder before installing the product. Do not block the air intake on the bottom of the unit.</p> <div> <div>  <p>Too deep Depth over 112mm.</p> </div> <div>  <p>Too shallow.</p> </div> <div>  <p>May slide-off the gap.</p> </div> <div>  <p>Oversized / Unstable.</p> </div> <div>  <p>Blocking the air flow.</p> </div> </div> <div>Recommended size of cup holder diameter over 80mm</div>




## Fan mode / LED pattern

Start with Turbo-mode	Normal-mode	To be Standby-mode
 <p>1 min.</p> <p>①White (solid)</p>	 <p>1 hr.</p> <p>②Full-color gradation</p>	 <p>⑧White (flash)</p>
<div>  <b>6 LED patterns for Normal-mode</b> </div> <div>  <p>③Blue &amp; Green gradation</p>  <p>④Orange &amp; Violet gradation</p>  <p>⑤Sky-blue</p>  <p>⑥Pink</p>  <p>⑦White (dimmed)</p> </div>		

Estimated replacement period	Memory Function
※approx. <b>3</b> weeks ※Durability may change due to the climate conditions.	<p>When LED pattern is in any of Setting #2 - 7, it can be set up in a desired pattern by pressing down the button at the top of the lid for 3 sec. (1 red flash). This operation allows it to stay in the same setting while it is in "Normal-mode". However, it activates "Turbo-mode" each time the ignition is turned on.</p>


## INSTRUCTION




①Take off the cap of Cartridge sold separately and through away. ②Remove the inner-seal. In case a translucent film remains, remove it. ③Turn and take off upper part of DC360 Diffuser and set Cartridge firmly.(Figure 2) ④Replace upper part firmly into lower part.(Figure 3) ⑤Connect USB-C of the provided cable to the port of the unit.(Figure 4) ⑥Place the unit in a cup holder which holds and keeps the unit stable and straight at all time. ⑦Connect the cable to a USB port in the vehicle.

Specification	(Figure 1) Cartridge sold separately CAP INNER-SEAL TABLET CONTAINER <div>DO NOT EAT.</div> <div>In case a translucent film remains, remove it.</div>
Power supply: <b>+DC5V 1A</b> Power consumption: <b>Turbo-mode/1.2W</b> <b>Normal-mode/0.5W</b> <b>Standby-mode/0.1W</b> Operating temperature range : <b>0~40℃</b>	(Figure 2)  Upper part Insert Cartridge from the bottom till it clicks. Cartridge Turn the upper part of the unit in the direction of the arrow.
(Figure 3) ※Be sure to set in the correct position in order to prevent damages. <div>Line up two shorter lines</div>  Lower part Turn from shorter line to longer line. Check if the upper part is set firmly.	(Figure 4)  USB Type-C cable <div>※When disconnecting USB terminal, do not pull on the cable. ※Do not use cables other than the provided cable.</div>

## OPERATION MANUAL

DC 360 Diffuser turns on automatically when the ignition is turned on and start with "Turbo-mode" after completing a self-diagnosis by the heat detection sensor.\*Settings of LED pattern is adjustable while it is in "Normal-mode".



▼Fan mode / LED pattern	Settings of LED patterns in Normal-mode
<div> <div>Turbo-mode</div> <div>Normal-mode</div> <div>Standby-mode</div> </div> <div>    </div> <div> <p>①White (solid)</p> <p>②Full-color gradation    ③Blue &amp; Green gradation            ④Orange &amp; Violet gradation    ⑤Sky-blue            ⑥Pink    ⑦White (dimmed)</p> <p>○Pressing Select Button switches between LED pattern #2 - 7.            ○LED pattern remains in #2 Full-color gradation unless pressing Select Button.            *LED pattern does not shift automatically between Settings #2 - 7.</p> </div>	<p>When LED pattern is in any of Setting #2 - 7, it can be set up in a desired pattern by pressing down the button at the top of the lid for 3 sec. (1 red flash). This operation allows it to stay in the same setting while it is in "Normal-mode". However, it activates "Turbo-mode" each time the ignition is turned on. *Settings of LED pattern is adjustable while it is in "Normal-mode".</p> <p><b>Reset of LED patterns</b>            Pressing down the button at the top side for 3 sec. again (3 red flashes) resets LED pattern to factory setting and will activate Setting #2 while in "Normal-mode" when it turns on next time.*Settings of LED pattern is resettable during in any modes.</p> <div> <p>・ Do not operate the product while driving.</p> <p>・ The product cannot be fixed in "Turbo-mode".</p> <p>・ The fan and LED lighting will also be turned off when the ignition is turned off.</p> <p>・ In some type of vehicles, this product may not be turned off even if the enjin, electric motor or ACC are turned off.</p> <p>・ In order to stop the product completely, disconnect the cable. When disconnecting the cable, be sure to turn off the ignition of the vehicle.</p> </div>

Self-diagnosis	Turbo-mode	Normal-mode
<div>Within operating temperature range</div> <div>Automatically shift to Turbo-mode</div> <div>Outside of operating temperature range</div> <div>LED lighting turns in orange and the fan stops. With temperature to came into the operating temperature range, it activates in Standby-mode.</div>	<div>Fan: Strong (continuously)</div> <div>LED: Pattern #1 White (solid)</div> <div>Standby-mode</div> <div>Fan: In pause</div> <div>LED: Pattern #8 White (flash)</div>	<div>Fan: Shift between pause and blow.</div> <div>LED: Start with Pattern #2 which can be adjusted between Pattern #2 - 7 by pressing the button at the top side.</div>

While REBOOT Cartridge or DC360 Cartridge sold separately is in use.

## CAUTIONS

- \*For safety reasons, do not operate or handle the unit while driving.
- \*Do not eat.
- \*Avoid contact with skin and eyes.
- \*Keep away from the fire.
- \*Keep out of reach of children and pets.
- \*Do not touch or insert fingers into the fan; it may cause injuries or damages to the unit.
- \*If swallowed, seek medical advice immediately.
- \*Avoid contact with skin and eyes. In case of contact, rinse effected area thoroughly with water.
- \*If you are feeling unwell while using the product, immediately stop using the product and rest in an well-ventilated area. In case your condition is not improving, seek medical advice.

- Do not use for any purposes other than specified usage.
- Place the unit where it will not interfere with driver, air bag and safety.
- Do not place this product other than in cup holders.
- Do not place this product in cup holders have keep-warm feature.
- Keep the clearance above the unit ≥50mm to avoid contact interiors and electronic devices. It may cause staining, crack or other problems.
- Do not block the air intake on the bottom of the unit. It may not work properly.
- Do not expose the unit to heated air. This product does not work properly if the unit overheats.
- Do not use anything other than designated Cartridge sold separately.
- If a leak occurs, clean up immediately; otherwise the contents may cause staining, crack or other problems.
- Do not use cables other than the provided cable.
- Do not use the provided cable for any other devices.
- When disconnecting USB terminal, do not pull on the cable.
- In case the product does not operate properly due to the non-standardized power supply, connect to a USB port with different power supply.
- Change the installation location in case a smart key does not respond while the unit is on.
- Do not wet, lay, and drop the unit.
- Do not operate with wet hands, attempt to disassemble or modify the unit. It may damage the unit.
- Discoloration of tablet does not affect product quality and functions.
- If the unit gets dirty, wipe gently with soft cloth.